


AP MINIFORT[®]

Maximum Versatility and Affordability

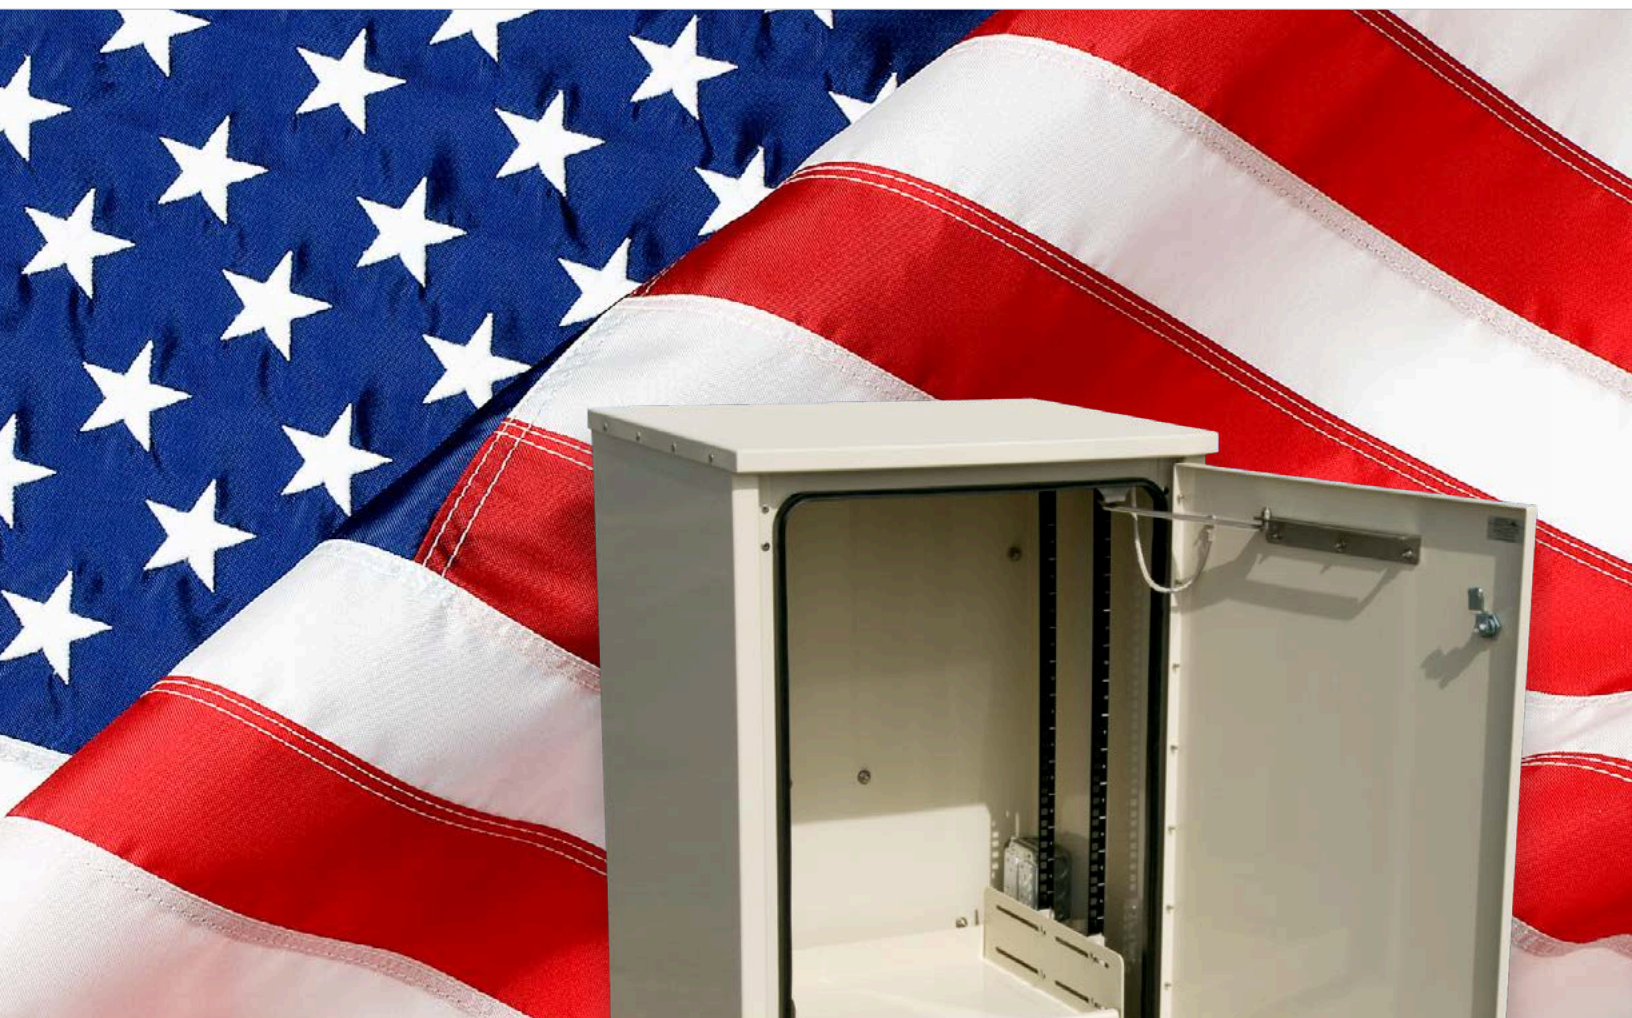

AMERICAN
PRODUCTS 
Turn-Key Enclosure Solutions

AP MINIFORT® Standard Offerings



.090 Aircraft Grade Aluminum: Outstanding corrosion resistance.



NEMA Protection: Protection Level Type 3R. This enclosure protects against rain, sleet, snow, splashing water and damage from external ice formation. Tested and certified to UL 50 / 50E standards for safety.



Stainless Steel Hardware: We choose the highest quality materials to produce our enclosures. Type 304 stainless steel hardware will not rust in the field.




GR487 Powder Coat: Enclosures are powder coated and tested to the Telcordia GR487 specifications for telecom enclosures.



Power: A pre-wired 20 Amp quad receptacle is a standard feature.



Numbered Adjustable Equipment Racks: 19" or 23"



Ground Terminal Strip: 7 position aluminum strip



Locking: Extremely secure, strong and impermeable. Lockable handles and hinges are made from Type 300 stainless steel.



Standard Color / finish choices:


Colors shown here are approximate.



Beige



White




Grey



Custom




**Call a Sales
Representative
for Assistance.**

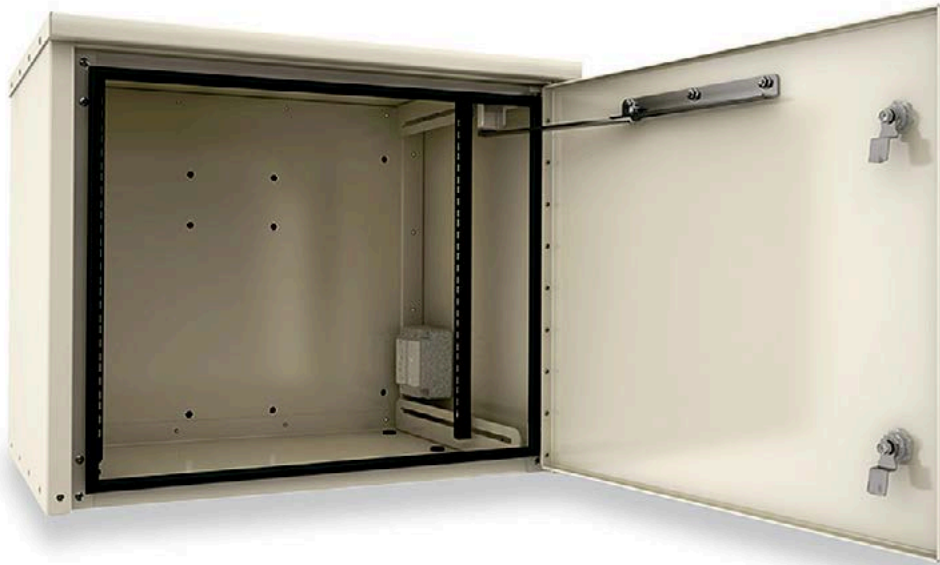

AP MINIFORT® Options

Ground Pad Mount

6" Flanged base with mounting holes. Front & back removable panels




Pole Mount Bracket

For use with mounting clamps, straps or lag bolts. Compatible with 4"-8" diameter poles.



Wall Mount Bracket


Flanged back panels with mounting holes.



Door Alarm



Battery Compartment



Upgraded Copper Ground Bar



Additional Set of Rails



Load Center



Battery Tray



Generator Plug & Interlock



Insulation
Recommended for climate control options

AP MINIFORT® Climate Control Options



AC 1,000 to 6,000 BTU/hr*

- Built-in Heater
- Corrosion Protection
- Cold Start Heater



Exhaust Fan

- 115VAC / 12, 24, 48VDC
- Adjustable Thermostat
- Filters



Heat Exchanger

- Consult factory for sizes.



AC 1,000 to 6,000 BTU/hr

- 48 VDC Powered



Heater

- Built in adjustable thermostat
- 100W-1000W 115VAC




Battery Heater Pad

- 115VAC
- Fits on Battery Tray

Call a Sales Representative for Assistance.

Basic Layout

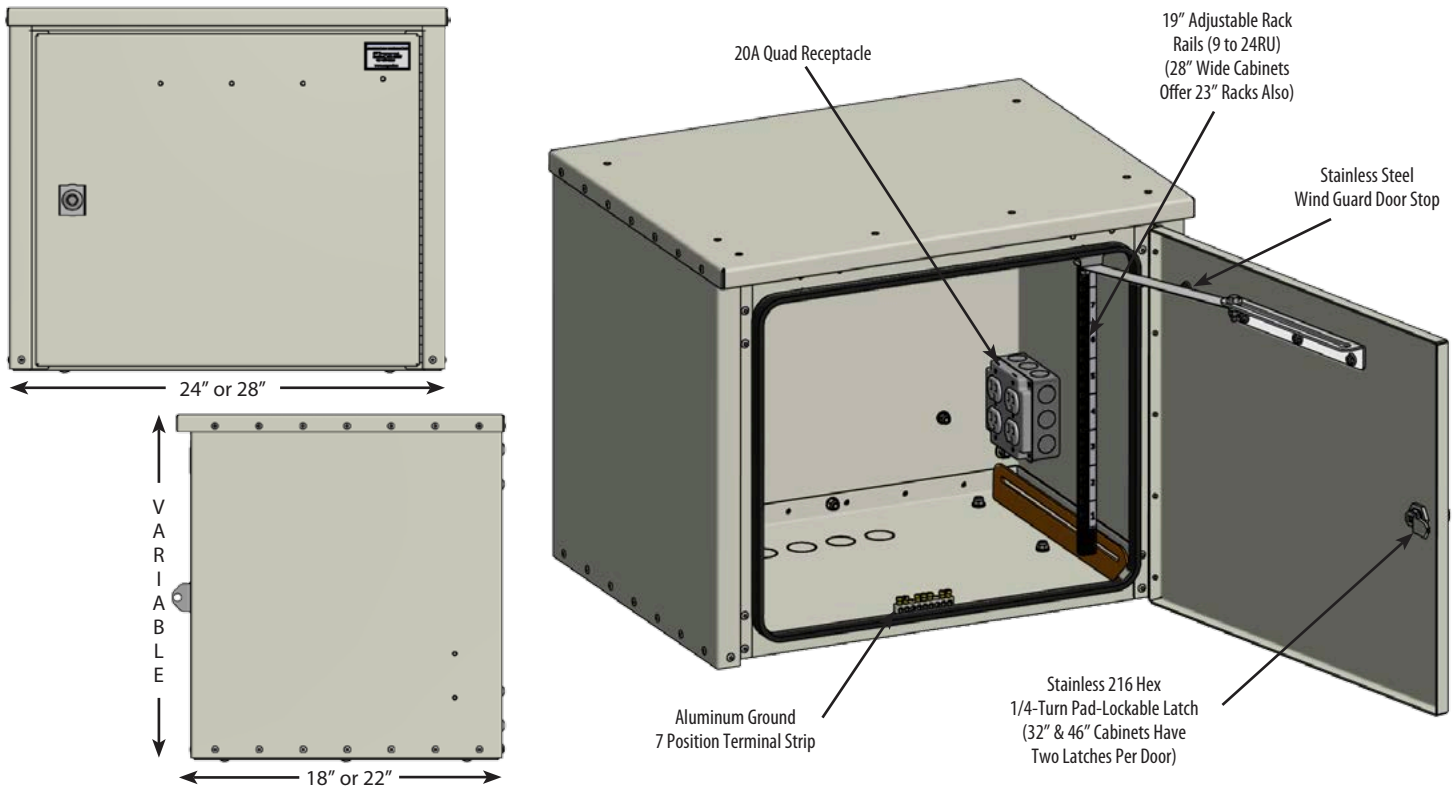

How to Order

RU's	HEIGHT	WIDTH	DEPTH	QUAD REP	RACK RAILS	ETL CERTIFICATIONS
9	20"	24"	18"	20 AMP	19"	UL 50 UL 50E CSA C22.2#94.1 CSA C22.2#94.2
9	20"	28"	22"	20 AMP	19" or 23"	
16	32"	24"	18"	20 AMP	19"	
16	32"	28"	22"	20 AMP	19" or 23"	
24	46"	24"	18"	20 AMP	19"	
24	46"	28"	22"	20 AMP	19" or 23"	

Try the Online Configurator to Design Your Own!

Call a Sales Representative for Assistance.